

TOSHIBA FIELD EFFECT TRANSISTOR SILICON N CHANNEL JUNCTION TYPE

2SK184


LOW NOISE AUDIO AMPLIFIER APPLICATIONS

Unit in mm

- High $|Y_{fs}|$: $|Y_{fs}|=15\text{mS (Typ.)}$ ($V_{DS}=10\text{V}$, $V_{GS}=0$)
- High Breakdown Voltage : $V_{GDS}=-50\text{V}$
- Low Noise : $NF=1.0\text{dB (Typ.)}$
($V_{DS}=10\text{V}$, $I_D=0.5\text{mA}$, $f=1\text{kHz}$, $R_G=1\text{k}\Omega$)
- High Input Impedance : $I_{GSS}=-1\text{nA (Max.)}$ ($V_{GS}=-30\text{V}$)
- Small Package

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|---------------------------|-----------|---------|------------------|
| Gate-Drain Voltage | V_{GDS} | -50 | V |
| Gate Current | I_G | 10 | mA |
| Drain Power Dissipation | P_D | 200 | mW |
| Junction Temperature | T_j | 125 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -55~125 | $^\circ\text{C}$ |

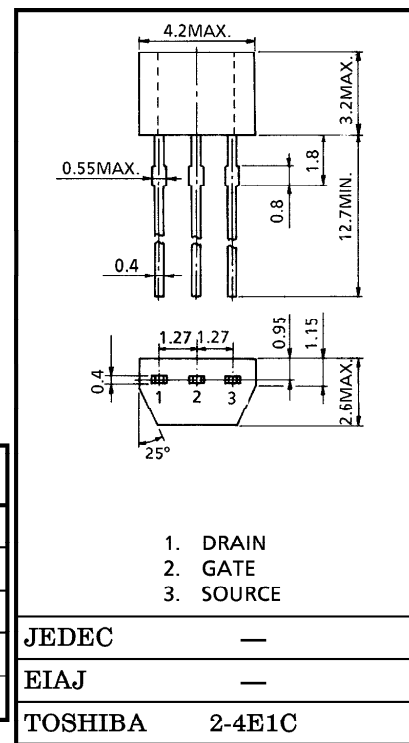

Weight : 0.13g

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)


| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|------------------------------|---------------------|---|------|------|------|------|
| Gate Cut-off Current | I_{GSS} | $V_{GS} = -30\text{V}$, $V_{DS} = 0$ | — | — | -1.0 | nA |
| Gate-Drain Breakdown Voltage | $V_{(BR)GDS}$ | $V_{DS} = 0$, $I_G = -100\mu\text{A}$ | -50 | — | — | V |
| Drain Current | I_{DSS} (Note) | $V_{DS} = 10\text{V}$, $V_{GS} = 0$ | 1.2 | — | 14.0 | mA |
| Gate-Source Cut-off Voltage | $V_{GS(OFF)}$ | $V_{DS} = 10\text{V}$, $I_D = 0.1\mu\text{A}$ | -0.2 | — | -1.5 | V |
| Forward Transfer Admittance | $ Y_{fs} $ | $V_{DS} = 10\text{V}$, $V_{GS} = 0$, $f = 1\text{kHz}$ | 4.0 | 15 | — | mS |
| Input Capacitance | C_{iss} | $V_{DS} = 10\text{V}$, $V_{GS} = 0$, $f = 1\text{MHz}$ | — | 13 | — | pF |
| Reverse Transfer Capacitance | C_{rss} | $V_{DG} = 10\text{V}$, $I_D = 0$, $f = 1\text{MHz}$ | — | 3 | — | pF |
| Noise Figure | NF (1) | $V_{DS} = 10\text{V}$, $R_G = 1\text{k}\Omega$, $I_D = 0.5\text{mA}$, $f = 10\text{Hz}$ | — | 5 | 10 | dB |
| | NF (2) | $V_{DS} = 10\text{V}$, $R_G = 1\text{k}\Omega$, $I_D = 0.5\text{mA}$, $f = 1\text{kHz}$ | — | 1 | 2 | |

Note : I_{DSS} Classification Y : 1.2~3.0mA, GR : 2.6~6.5mA, BL : 6.0~14.0mA


961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.


STATIC CHARACTERISTICS

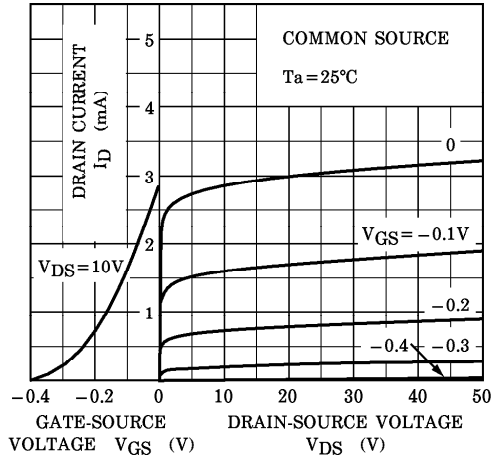


I_D - V_{DS} (LOW VOLTAGE REGION)

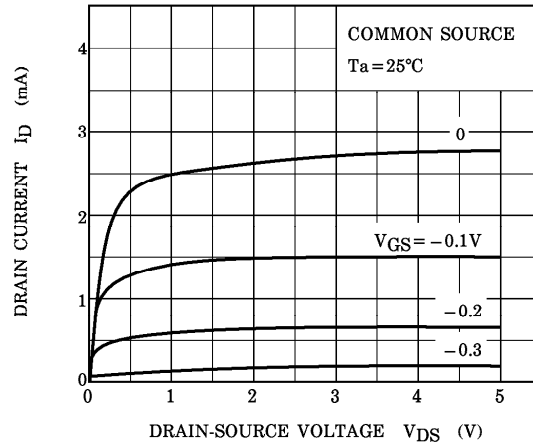


I_D - V_{GS}

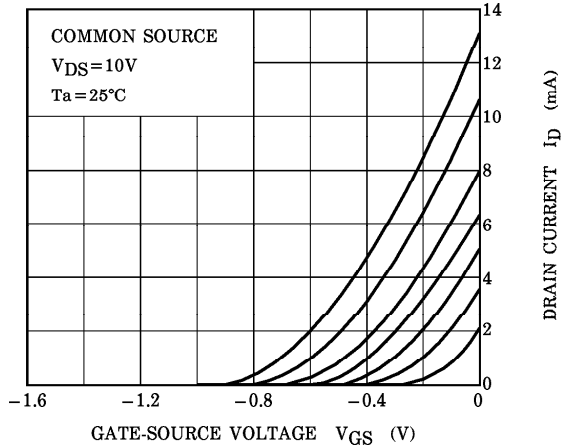


|Y_{fs}| - I_D

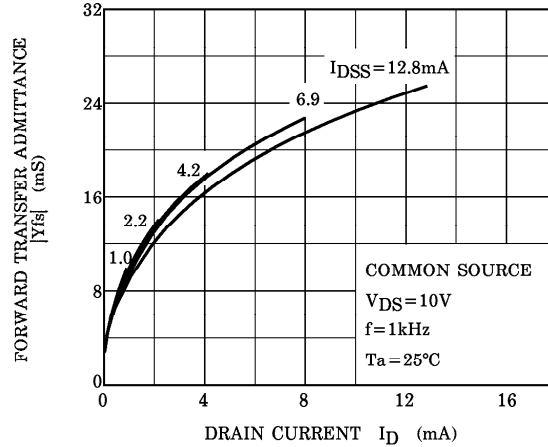

V_{GS(OFF)} - I_{DSS}

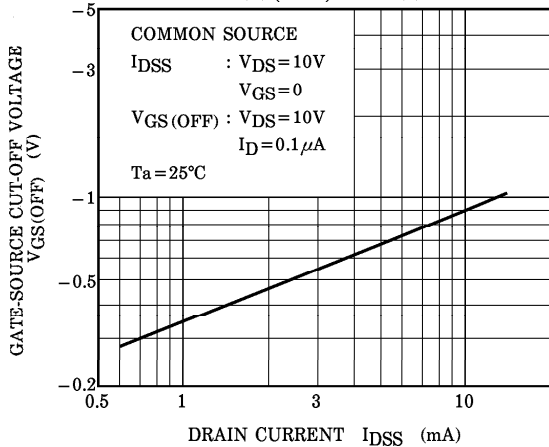

|Y_{fs}| - I_{DSS}

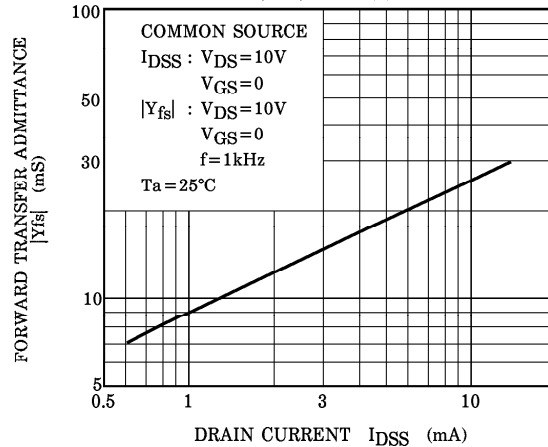

961001EAA2'

● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
● The information contained herein is subject to change without notice.

