

1





2

3

4

5

參考資料

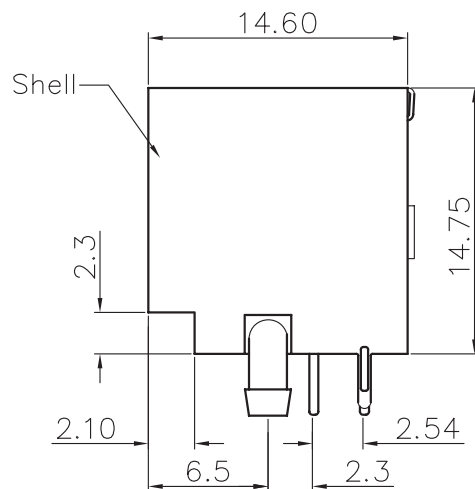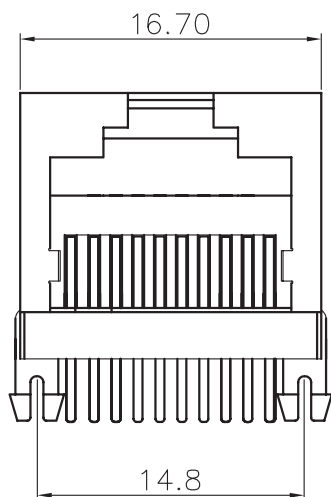

Specifications:

Current Rating:1.5A AC/DC

Voltage Rating:125V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:500M ohm. Min.

Withstanding Voltage:1,000V AC For One Minute

Operating Temperature Range: -40°C to +85°C

Material and Finish:

Insulator:PBT (UL94V-0)

Insulator Color:Black,White

Contact:Phosphor Bronze 


Plated:Gold Plated

Shield:Copper Alloy With Nickel Plated



How To Order

7810-XPXC

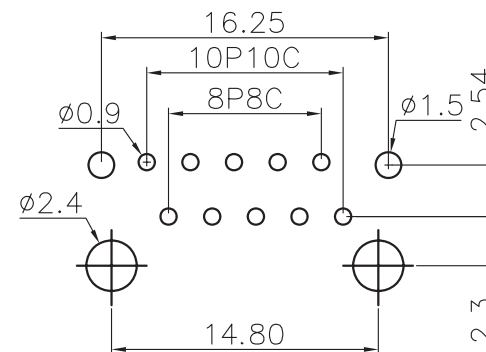8,10 Contacts
8,10 Contacts



P.C.B Layout

				DRAWN:	GENERAL TOLERANCE:	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
E				CHECKED:	.X=±0.2 .XX=±0.15		
D					UNIT: MM	DESCRIPTION:	SIZE
C					SCALE:	Modular jack side entry shielded	A4
B	22-May-2008	ECN-CN080527			SHEET: 1 / 1	PART NO:	
A	07-30-2002	(P0041)		APPROVAL:	PROJECTION: 	7810-XPXC	
REV	DATE	FILE	BY				